


MSI


Making Dream Surfaces Attainable

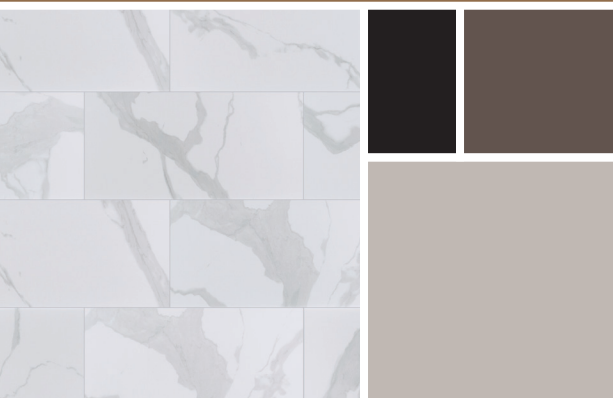


Eden Statuary
Porcelain Collection

www.msisurfaces.com

Colors



Statuary Matte 12"x24"



Statuary Polished 24"x24"



Statuary Hexagon 3"x3"

Size	Thickness	STATUARY MATTE	STATUARY POLISHED
12X24	3/8"	NEDESTA1224	NEDESTA1224P
24X24	3/8"	NEDESTA2424	NEDESTA2424P
24X48	3/8"	NEDESTA2448	NEDESTA2448P
32X32	3/8"	NEDESTA3232	NEDESTA3232P
4X24	3/8"	NEDESTA4X24BN-N	NEDESTA4X24BNP-N
3X3	3/8"	NEDESTA3X3HEX	
2X2	3/8"	NEDEST2X2	
2X2 HEX	3/8"	NEDEST2X2HEX	

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	IV	V3	DCOF < 0.42 Polished DCOF > 0.42 Matte	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Luxury and durability come together in our Eden Collection. Available in matte and polished finishes and in the most sought after large format sizes 24"x24", 32"x32", and 24"x48" Eden gives floors, walls, and countertops a classic yet modern aesthetic that's welcomed in any home or commercial space. Indoors or out, no matter where this stylish collection goes the compliments are sure to follow.

Technical Information

Primary Colors: White
 Material Type: Porcelain
 Finish: Polished, Matte
 Polished: Hardness / Mohs 5
 Matte: Hardness / Mohs 7

Features At A Glance

- Unique Large Format 24X48 & 32X32
- 1 Color In A Marble Look
- Available In Matte And Polished Finishes

Trim



4" x 24" Bullnose

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Disclaimer: Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

