

Model: HAWI WHITE 13"X39" approx.


Codes: 100295016

Water absorption: BIII - Revestimiento (10%≤E≤20%)

Finish: Glazed / Standard

Tone variations: V2




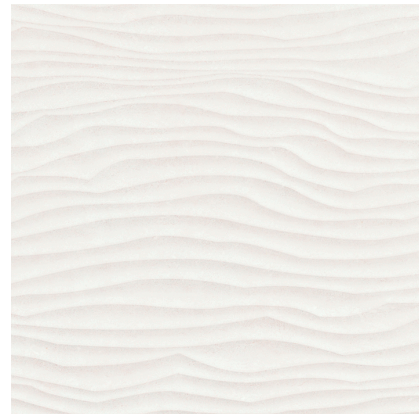

Rectified: Yes



DIMENSIONAL FEATURES

Thickness	7/16" approx	+/-5%*
Width	13 1/8" approx	
Length	39 3/8" approx	
Length and width deviation	Below 0.15%	+/-0.3%*
Side straightness deviation	Below 0.15%	+/-0.3%*
Squareness deviation	Below 0.15%	+/-0.3%*
Surface flatness deviation	Below 0.15%	+/-0.4%*

FEATURES

-  Natural-looking, non-glossy surface finish.
-  General deshaded design with a degree of color and appearance variation.
-  Name given to the finish of those tiles dimensionally improved after the firing process.
-  Finish with clearly defined protrusions that give the surface a feeling of volume.
-  Wall installation

MECHANICAL FEATURES

Breaking strength	>134.94 LBF	>125LBF*
Modulus of rupture	>3.37 LBF	>=3LBF*
Crazing resistance	Resists 3 cycles	
Resistance to thermal shock	RESISTE	

HYGIENIC FEATURES

Chemical resistance	Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases	B Min.*
Stain resistance	Class 5. Easy cleaning with water	3 Min.*

ANTI-SLIP VALUE

Friction (dry)	No Aplica	
Friction (wet)	No Aplica	
Dynamic coefficient of friction (dcof)	No Aplica	

PACKING

Sales units per box	14.34 SQF/CS	
Sales units per pallet	630.85 SQF/PAL	
Sales units per unit	3.58 SQF/ST	

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double gluing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.

SCOPE OF USE

Technical code-1

1 - Use on walls

System Certification



Do not use cleaning agents containing hydrofluoric acid.
It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.
For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double glueing technique.
Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.