


Series **Valkiria**



Valkiria Esir Maple Mate 30x75 Rc Pb

30x75 RC PB

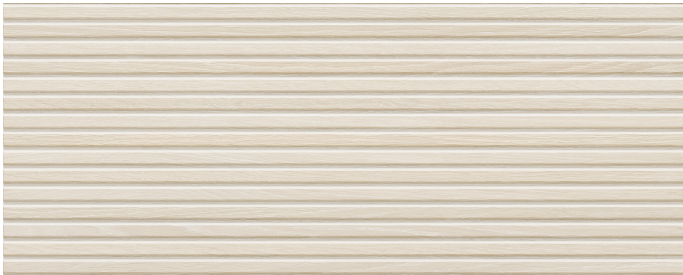

Technical Data



Series: VALKIRIA
Product: Valkiria Esir Maple Mate 30x75 Rc Pb
Size: 30x75 RC PB
Sales group: G.133
Type: WALL TILE

Type of material: White body
Slipperness R:
Class:
UPEC:
Finish: MATT


Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
30x75 RC PB	Relief	7	1,575	21,278	54,000	85,050	1149,012

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

Technical Data

Valkiria Esir Maple Mate 30x75 Rc Pb

Family:	WALL TILE MATT
Absortion Group:	BIII
Size:	30x75 RC PB
Worz Size (mm):	750 x 300 x 8

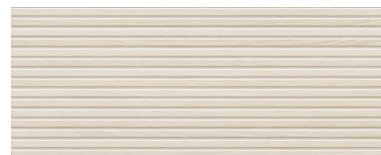

PHYSICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E>10%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>600
Flexural tensile strengthn (N/mm2)	UNE-EN-ISO 10545-4	>=12
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	For indoor use only
Moisture expansion (mm/m)	UNE-EN-ISO 10545-10	0,2
Linear thermal expansion from 200°C to 1000°C	UNE-EN-ISO 10545-8	5,2x10-6 ?C-1
Reaction to fire	UNE-EN-ISO 13501-1	A1
DCOF	DCOF	

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistrance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB

Series **Valkiria**



Valkiria Esir Oak Mate 30x75 Rc Pb

30x75 RC PB



Technical Data



Series: VALKIRIA
Product: Valkiria Esir Oak Mate 30x75 Rc Pb
Size: 30x75 RC PB
Sales group: G.133
Type: WALL TILE

Type of material: White body
Slipperness R:
Class:
UPEC:
Finish: MATT

Size	Product type	Pcs/Box	M2/Box	Kg/Box	Boxes/Pallet	M2/Pallet	Kg/Pallet
30x75 RC PB	Relief	7	1,575	21,278	54,000	85,050	1149,012

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

Technical Data

Valkiria Esir Oak Mate 30x75 Rc Pb

Family:	WALL TILE MATT
Absortion Group:	BIII
Size:	30x75 RC PB
Worz Size (mm):	750 x 300 x 8



PHYSICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Dimensional tolerances and surface appearance	UNE-EN-ISO 10545-2	Complies with the standar
Water Absortion	UNE-EN-ISO 10545-3	E>10%
Breaking strenght (N)	UNE-EN-ISO 10545-4	>600
Flexural tensile strengthn (N/mm2)	UNE-EN-ISO 10545-4	>=12
Thermal shock resistance	UNE-EN-ISO 10545-9	Complies with the standar
Cracking resistance	UNE-EN-ISO 10545-11	Complies with the standar
Frost resistance	UNE-EN-ISO 10545-12	For indoor use only
Moisture expansion (mm/m)	UNE-EN-ISO 10545-10	0,2
Linear thermal expansion from 200°C to 1000°C	UNE-EN-ISO 10545-8	5,2x10-6 ?C-1
Reaction to fire	UNE-EN-ISO 13501-1	A1
DCOF	DCOF	

CHEMICAL CHARACTERISTICS

CHARACTERISTICS	STANDARD	VALUE
Resistance to staining	UNE-EN-ISO 10545-14	Complies with the standars
Resistrance to chemicals and pool treatment products	UNE-EN-ISO 10545-13	Complies with the standars
Resistance to High concentration acids and bases	UNE-EN-ISO 10545-13	MIN HB
Resistance to Low concentration acids and bases	UNE-EN-ISO 10545-13	MIN LB